




- Material: Plastic
- Direction: Clockwise, see on the motor
- Protection: IP44
- Insulation class: B
- Mounting position: Any
- Speed mode: Two speed mode
- Bearing: Ball bearing
- Run on timer: 5~30minutes
- Perm. Amb. temp: -10°C~+60°C
- Certification: CE



Nominal data		Curve	Nominal voltage	Frequency	Air flow	Speed	Power input	Current	Air pressure	Sound pressure	Perm. amb. temp.	Weight
Type	Speed Mode	VAC	Hz	m³/h	rpm	W	A	Pa	dB (A)	°C	Kgs	
XP2S100-303D-0REV-CIN01	High Speed	A	230	50	198	2200	26	0.12	156	31	-10°C~+60°C	2
	Low Speed	B	230	50	165	1850	23	0.11	131	26	-10°C~+60°C	2
XP2S100-303D-0RMX-CIN01	High Speed	/	115	60	198	2200	30	0.26	156	31	-10°C~+60°C	2
	Low Speed	/	115	60	165	1850	28	0.24	131	26	-10°C~+60°C	2

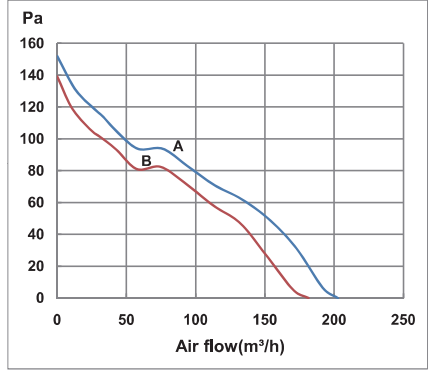